

ARB AIR LOCKER *Air Operated Locking Differentials*

RD148 AAM 760,28 spl

Specs:


Axle Spline	28 tooth, Ø30.5mm [1.20"]
Ratio Supported	All
Ring Gear ID	117.51mm [4.63"]
Ring Gear OD	193mm [7.6"]
Ring Gear Bolts	10 bolts on Ø147.32mm [5.8"]
Ring Gear Torque	130Nm [96 ft-lb]
Backlash	0.15-0.25mm [0.006-0.010"]
Bearing Cap Torque	63Nm [46 ft-lb] (aluminium) 75Nm [55 ft-lb] (cast iron)

ITEM #	QTY	DESCRIPTION	PART #	NOTES
1	2	SEAL HOUSING O-RING	160235	1
2	1	SEAL HOUSING ASSEMBLY	081801	
3	2	SHIM KIT	SHK003	
*	2	MASTER SHIM	150325	
4	1	BONDED SEAL	160701	
5	1	CLUTCH GEAR	050803	
6	1	SPIDER BLOCK	070503	
7	1	LONG CROSS SHAFT	061302	
8	1	SIDE GEAR	SEE NOTE	3
9	2	COUNTERSUNK SCREW	200213	
10	3	CROSS SHAFT RETAINING PIN	120601	
11	2	TAPERED ROLLER BEARING	160114	2
12	1	FLANGE CAP ASSEMBLY	028509	
13	8	RETURN SPRING	150113	
14	1	SPLINED SIDE GEAR	SEE NOTE	3
15	2	SHORT CROSS SHAFT	061402	
16	4	PINION GEAR	SEE NOTE	3
17	4	PINION THRUST WASHER	151112	
18	2	SIDE GEAR THRUST WASHER	151011	
19	1	DIFFERENTIAL CASE	013109	
*	1	BULKHEAD FITTING KIT (O-RING TYPE)	170111	
*	1	PUSH-IN FITTING (5mm to 1/8" BSPP)	170201	
*	1	AIR LINE (5mm DIA X 6m LONG)	170301	
*	1	NIPPLE (1/8" to 1/8" BSPT)	170501	
*	1	SOLENOID VALVE (12V)	180103	
*	1	SWITCH	180209	
*	1	SWITCH COVER (FRONT)	180210	
*	10	CABLE TIE	180301	
*	1	WARNING LABEL	210101	
*	1	BUMPER STICKER	210102	
*	1	OPERATION & SERVICE MANUAL	210200	
*	1	INSTALLATION GUIDE	2102148	

Notes:

- 1 For replacement O-rings use only BS135 Viton 75.
- 2 For replacement bearing use Timken part # LM102949 / LM102911
- 3 Available only as complete 6 gear set # 728J041

* Not illustrated in exploded view.

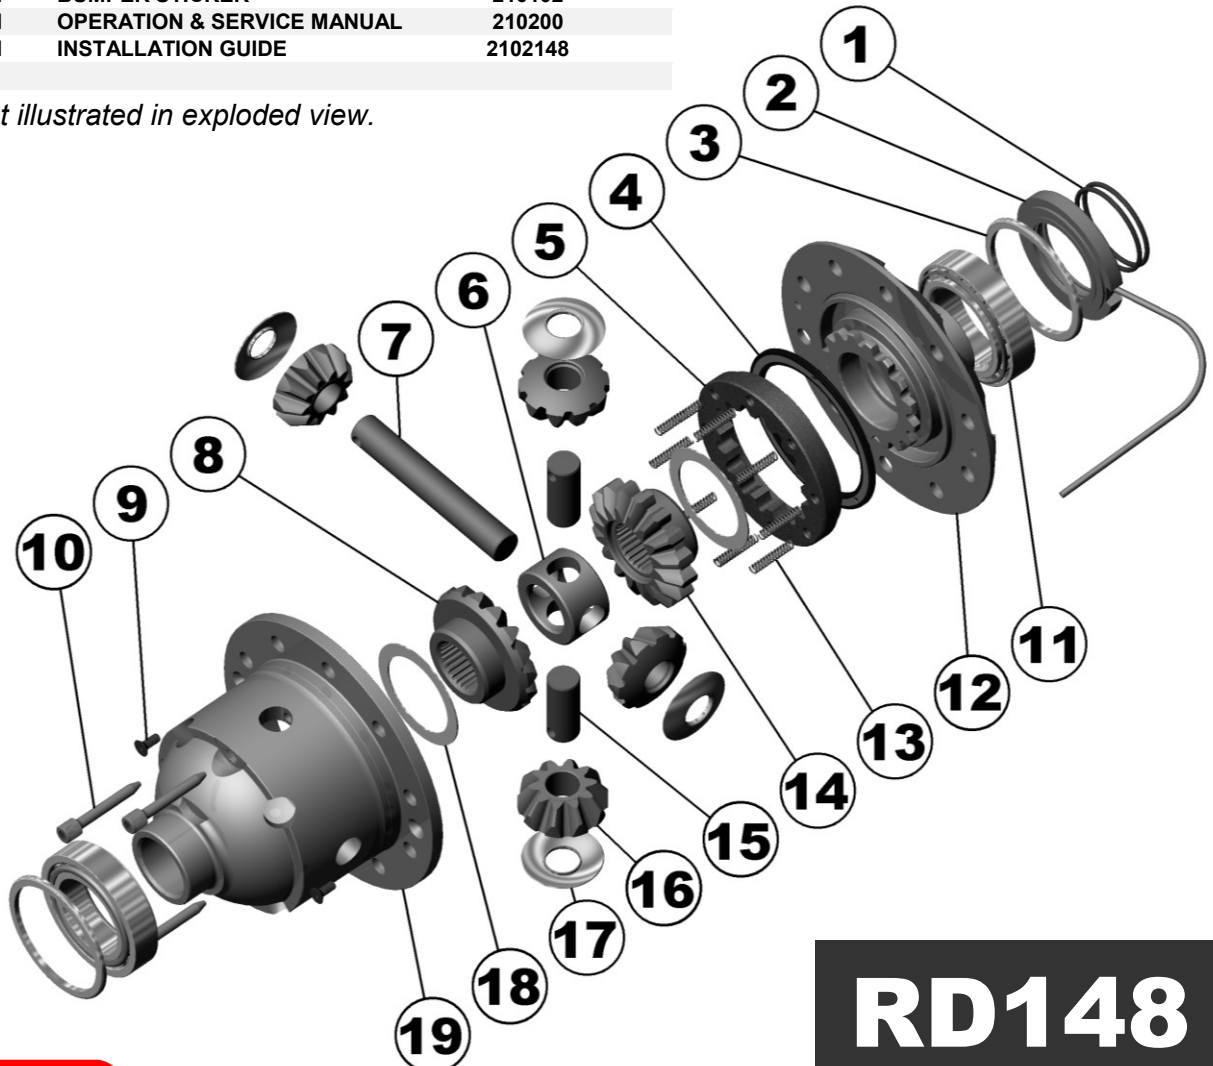

RD148

