



## **FITMENT INSTRUCTIONS**

**LT50 Basic Universal Lightweight Tent Mounting Bracket**

# Installation Instructions

---

## Preliminary information

Installation and fitment instructions including tools required, fasteners, kit, and the hardware..

Please follow the instructions and check installation actions with the images in this document.

Service Enquiries email  
[queries@alu-cab.com](mailto:queries@alu-cab.com)



# Installation Instructions

## Canopy Fitment – Tools, Fasteners & Hardware

### Tools & Items Required

1.1

Ratchet
13mm Spanner / Socket

1.3

### Hardware Required

Standard mounting bracket	4
---------------------------	---

1.2



### Fasteners Supplied (included with Side Boxes)

M8x80mm Hex Bolts	8
M8 Flat Washer	8
M8 Nyloc Nut	8

# Installation Instructions


## Universal Mounting Bracket

The longer bolts should be used for higher profile load bars, while the shorter bolts are intended for lower profile load bars.

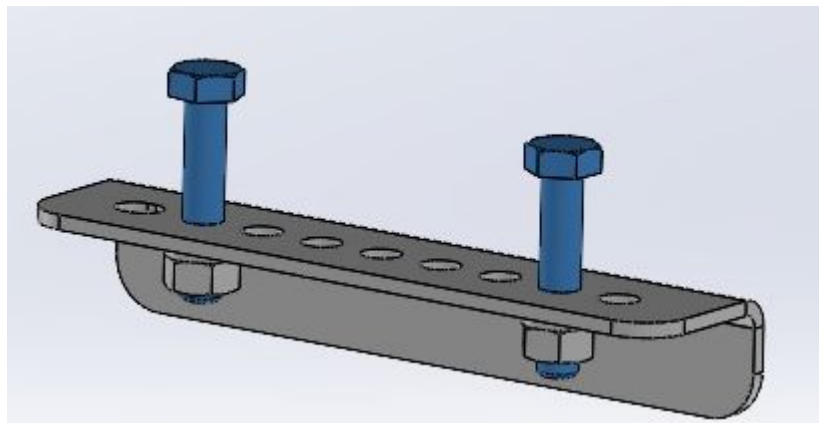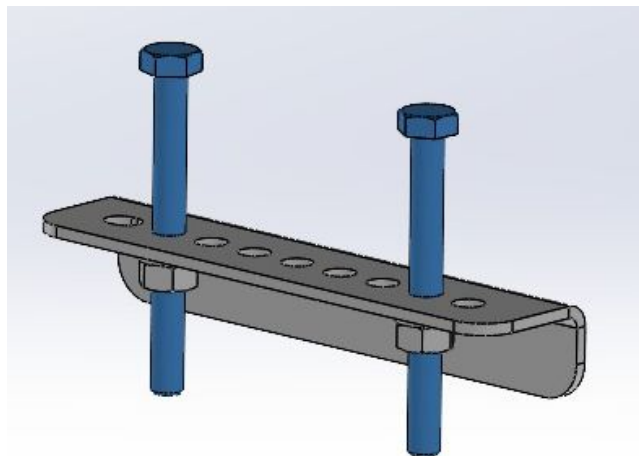

ITEM NO.	PART NUMBER	Revision	DESCRIPTION	QTY
1	LW-BKT-LB-UNI-P001	01	LIGHTWEIGHT - UNIVERSAL MOUNTING BRACKET	1
2	HEX-M8x80		M8x80 HEX BOLT S/S	2
3	NUT-M8		M8 HEX NUT S/S	2
4	FW-M8		M8x16mm FLAT WASHER S/S - DIN 125	2
5	HEX-M8x40		M8x40 HEX BOLT S/S	2
6	SW-M8		M8 SPRING WASHER S/S	2

# Installation Instructions

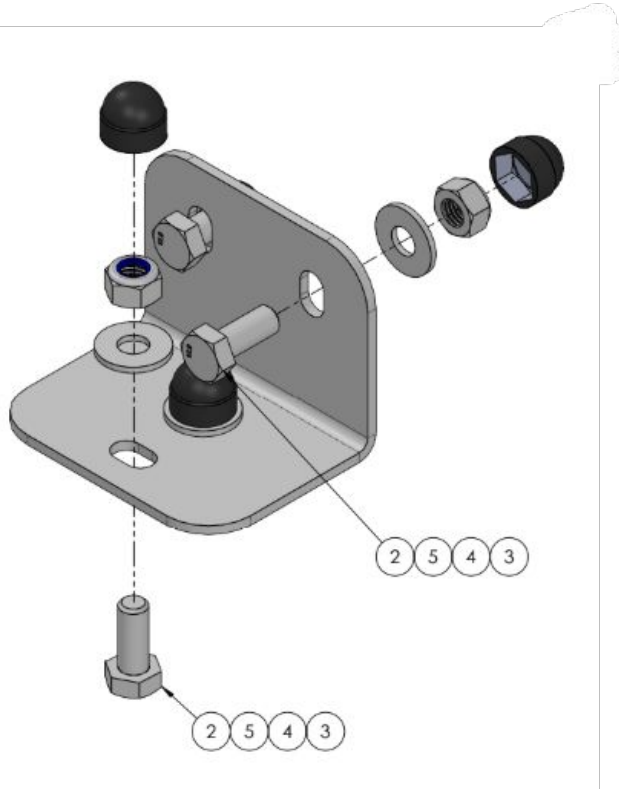


The **Universal Load Bar Mounting Bracket** to be fitted to the sides of the Tent for extra support and stability as shown on page 2 and page 8

ITEM NO.	PART NUMBER	Revision	DESCRIPTION	QTY
1	LW-BKT-LB-P001	00	LIGHTWEIGHT TO LOAD BAR BRACKET	1
2	HEX-M8x20		M8x20 HEX BOLT S/S	4
3	NCAP-M8		NUT CAP-08mm	4
4	NY-M8		M8 NYLOC NUT S/S	4
5	FFW-M8		M8x20mm OVERSIZED WASHER S/S - DIN 9021	4

# Installation Instructions

2.1

Place your tent on top of the vehicle load bars / roof rack bars

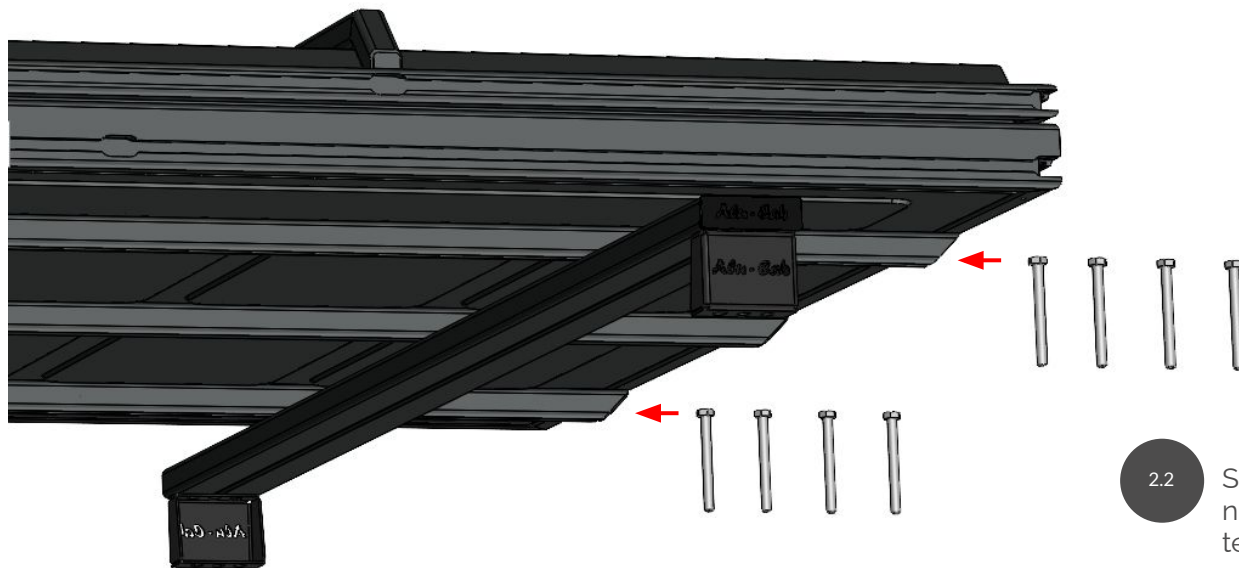


2.2


Slide the 8mm bolts into the outer nut slots on the underside of the tent. Slide in 4 per outer slot.

# Installation Instructions

- 3.1 Lift the tent enough to place a bolt on either side of the load bar, front and rear.

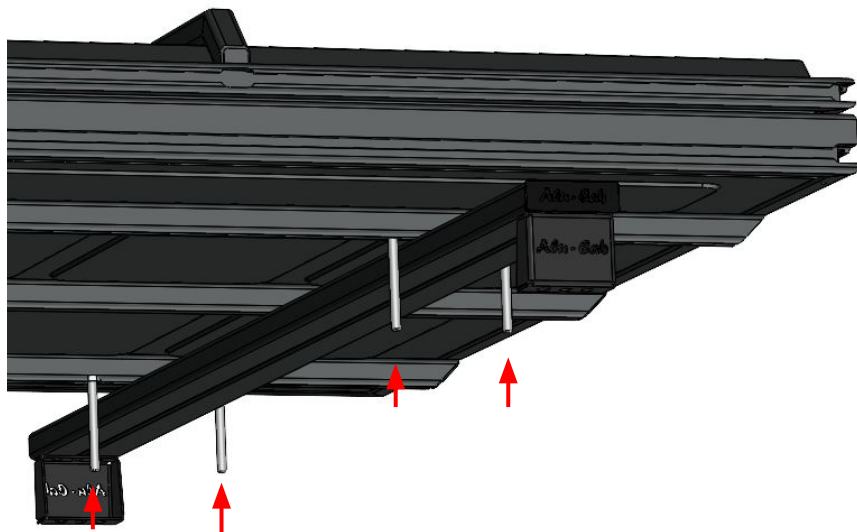


- 3.2 Align the bracket holes with the bolts and tighten the bracket up against the load bars using the washers and nuts supplied.

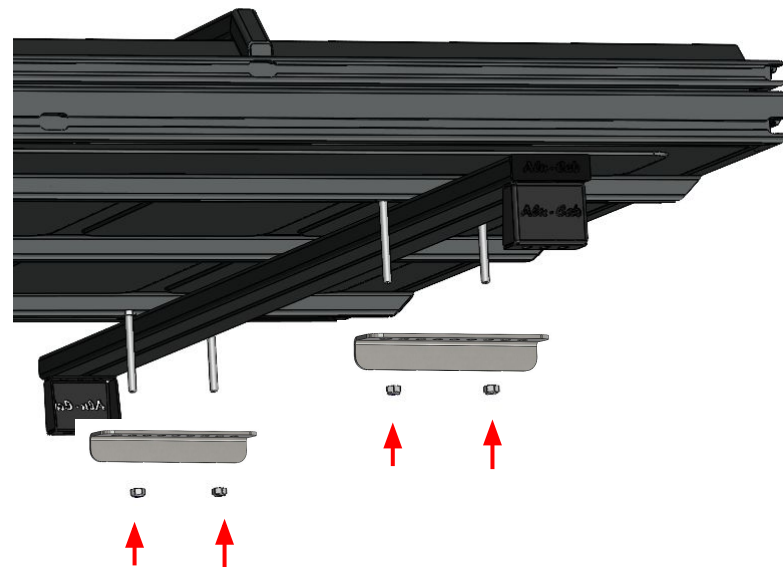

# Installation Instructions

Ensure that the tent is secure and that all nuts have been tightened evenly. .

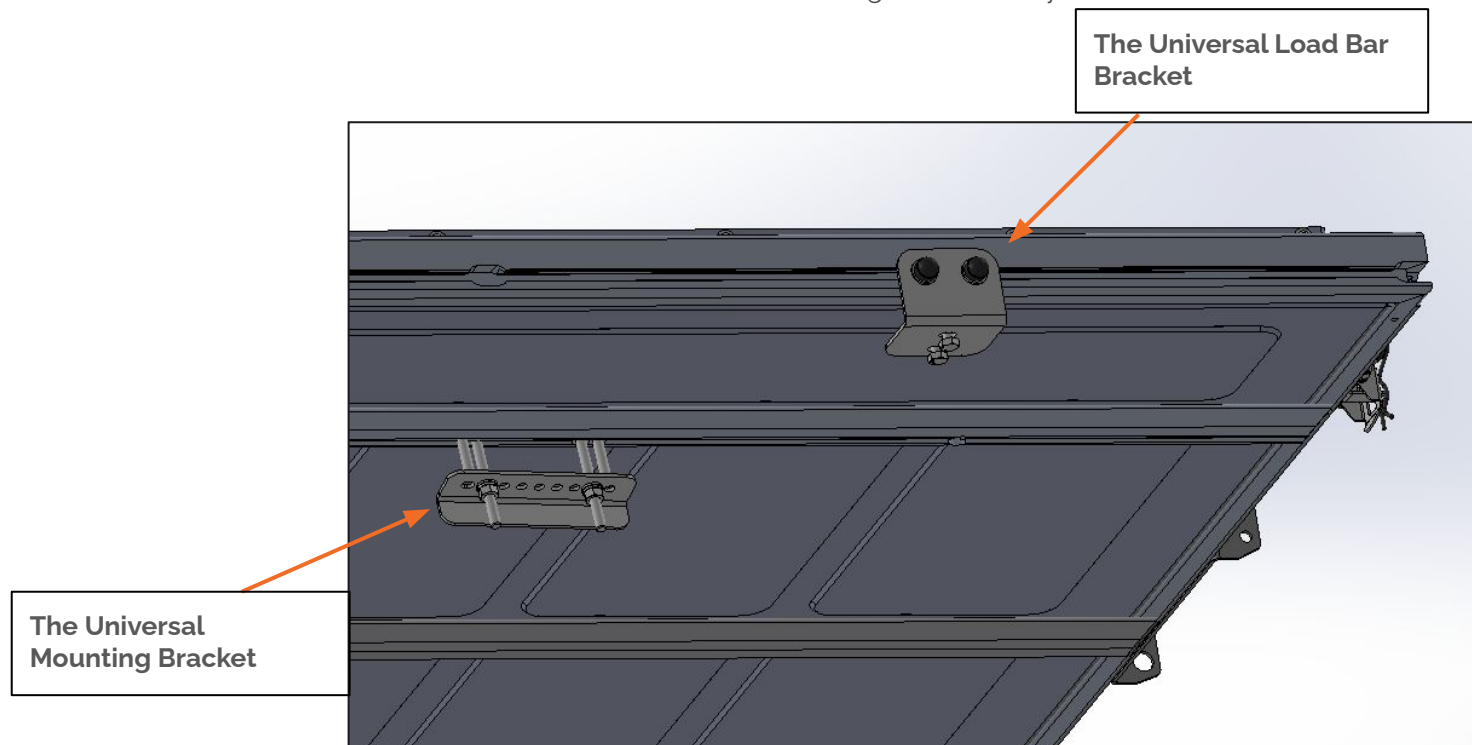



# Disclaimer

---

All rights reserved. No part of this website may be reproduced, translated, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without prior written permission of the owner.

## **Review all instructions information carefully before installation.**

Any damages, direct or incidental to the installer and/or property due to incorrect installation of any parts are the responsibility of the installer. Due to the various applications and fitment options available, the responsibility lies with the user to ensure all mounting points are secure and tight before every trip.

If unsure, consult with your Distributor regarding the operations of our products.

Users are advised to be mindful of the load they are carrying and drive in accordance with road conditions.

## **WARNING**

Always wear appropriate PPE (Personal protection equipment) when fitting our products. Although the mounting kit is designed to be DIY, if you have any doubts or concerns, contact an accredited fitment centre to carry out the work. Alu-Cab will not be liable for any injury to persons, and/or damage to products and/or vehicles.

While Alu-Cab Holdings takes reasonable measures to ensure that the contents of this Website are accurate and complete, Alu-Cab Holdings makes no representations or warranties, whether express or implied, as to the quality, timeliness, operation, integrity, availability or functionality of this Website or as to the accuracy, completeness or reliability of any information on this Website. Alu-Cab Holdings reserves the right to make changes, corrections and/or improvements to the information and to the products and programs described in such information, at any time without notice.

Alu-Cab Holdings will use reasonable endeavours to maintain the availability of the Website, except during scheduled maintenance periods, and reserves the right to discontinue providing the Website or the service or any part thereof with or without notice to you. Any person who accesses this Website or relies on this Website or on the information contained in this Website does so at his or her own risk.

Occasionally, at our discretion, we may include or offer third-party products or services on our website. These third-party sites have separate and independent privacy policies. We therefore have no responsibility or liability for the content and activities of these linked sites. Nonetheless, we seek to protect the integrity of our site and welcome any feedback about these sites.